

DH-HAC-HDBW1200R-VF



Tel: (01)489-5256 / 792-1818
RPM: #9722-52510 / 990-340327
ventas@jcworld.com.pe
Calle 15 Mz F Lote 25, Ofic. 101
Urb. Prolima- Los Olivos
www.jcworld.com.pe



2Megapixel 1080P Vandal-proof IR HDCVI Dome Camera



Features

- 1/2.7" 2Megapixel CMOS
- 25/30fps@1080P
- High speed, long distance real-time transmission
- Day/Night(ICR), AWB, AGC, BLC, 2DNR
- 2.7~12mm vari-focal lens
- Max. IR LEDs length 30m, Smart IR
- IP67, IK10, DC12V



DH-HAC-HDBW1200R-VF

Technical Specifications

Model	DH-HAC-HDBW1200RP-VF		DH-HAC-HDBW1200RN-VF
Camera			
Image Sensor	1/2.7" 2Megapixel CMOS		
Effective Pixels	1930(H)×1088(V)		
Electronic Shutter	1/50s~1/100,000s	1/60s~1/100,000s	
Video Frame Rate	25fps@1080P	30fps@1080P	
Synchronization	Internal		
Min. Illumination	0.02Lux/F1.4, 0Lux IR on		
Video Output	1-channel BNC HDCVI high definition video output		
Camera Features			
Max. IR LEDs Length	30m, Smart IR		
Day/Night	Auto(ICR) / Color / B/W		
Noise Reduction	2D		
Lens			
Focal Length	2.7~12mm		
Angle of View	H: 99° ~37°		
Lens Type	Manual / Fixed Iris		
Mount Type	Φ14		
General			
Power Supply	DC12V±20%		
Power Consumption	Max 5.8W		
Working Environment	-30℃~+60℃ / Less than 95%RH (no condensation)		
Transmission Distance	Over 500m via 75-3 coaxial cable		
Ingress Protection	IP67 & IK10		
Dimensions	Φ122mm×89mm		
Weight	0.45kg		
Material	Metal		

DH-HAC-HDBW1200R-VF

Dimensions (mm)

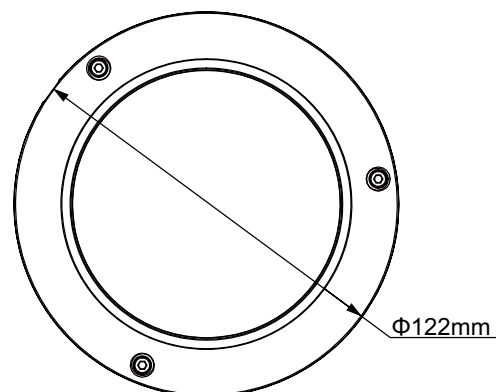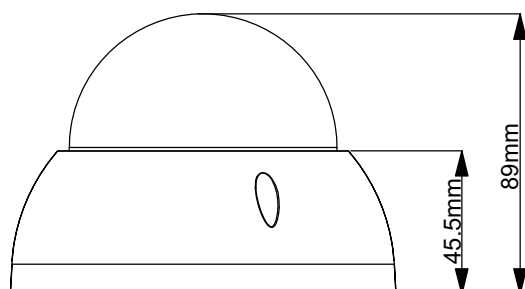

Accessories (optional)

		
PFB203W	PFA137	PFA152

Dahua Technology Co., Ltd.

1199 BinAn Road, Binjiang District, Hangzhou, China

Tel: +86-571-87688883

Fax: +86-571-87688815

Email: overseas@dahuatech.com

www.dahuasecurity.com

*Design and specifications are subject to change without notice.

© 2014 Dahua Technology