

DH-HCVR5204/5208/5216A-S3

4/8/16CH Tribrid 720P-Pro 1U HDCVI DVR



Features

- > Support HDCVI/Analog/IP Video self-adaptive input
- > H.264+/H.264 dual-stream video compression
- > HCVR5204/5208/5216A-S3: All channel 1080N/720P realtime or 1080P non-realtime recording
- > HDMI/VGA simultaneous video output
- > 4/8/16 channel synchronous realtime playback, GRID interface & smart search
- > Support Multi-brand network cameras: Dahua, Arecont Vision, AXIS, Bosch, Brickcom, Canon, CP Plus, Dynacolor, Honeywell, Panasonic, Pelco, Samsung, Sanyo, Sony, Videosec, Vivotek and etc.
- > ONVIF Version 2.4.1 conformance
- > Support 2 SATA HDDs, up to 12TB, 2 USB2.0(16CH 1 USB3.0)
- > 3D intelligent positioning with Dahua PTZ dome camera
- > Multiple network monitoring: Web viewer, CMS(DSS/Smart PSS)&Smart Phone(DMSS)
- > Advanced intelligent functions: Tripwire, Intrusion, Abandoned/Missing, Face Detection,P2P

DH-HCVR5204/5208/5216A-S3


Technical Specifications

Model		DH-HCVR5204A-S3	DH-HCVR5208A-S3	DH-HCVR5216A-S3
System				
Main Processor		Embedded processor		
Operating System		Embedded LINUX		
Video				
Input		4 channel, BNC	8 channel, BNC	16 channel, BNC
Standard	Analog	NTSC/PAL		
	HDCVI	1080P/720P HDCVI Camera		
	IP	4+2 up to 5Mp	8+4 up to 5Mp	16+8 up to 5Mp
Audio				
Input		4 channel, RCA		
Output		1 channel, RCA		
Two-way Talk		Reuse audio input/output channel 1		
Display				
Interface		1 HDMI, 1 VGA		
Resolution		1920×1080, 1280×1024, 1280×720, 1024×768		
Display Split		1/4/6	1/4/8/9	1/4/8/9/16
Privacy Masking		4 rectangular zones (each camera)		
OSD		Camera title, Time, Video loss, Camera lock, Motion detection, Recording		
Recording				
Video/Audio Compression		H.264+/G.711		
Record Rate	Main Stream:	1080P(1~15fps)		
	Stream:	1080N/720P/960H/D1/HD1/BCIF/CIF/QCIF (1~25/30fps)		
	Extra Stream	D1/CIF/QCIF(1~15fps)		
Bit Rate		1~6144Kb/s		
Record Mode		Manual, Schedule(Regular(Continuous), MD), Stop		
Record Interval		1~60 min (default: 60 min), Pre-record: 1~30 sec, Post-record: 10~300 sec		
Video Detection & Alarm				
Trigger Events		Recording, PTZ, Tour, Alarm out, Video Push, Email, FTP, Snapshot, Buzzer & Screen tips		
Video Detection		Motion Detection, MD Zones: 396(22×18), Video Loss & Camera Blank		
Alarm Input		8 channel	8 channel	16 channel
Relay Output		3 channel		
Intelligent Video (Optional)		Tripwire, Intrusion, Abandoned/Missing, Face Detection		
Playback & Backup				
Sync Playback		1/4	1/4/9	1/4/9/16
Search Mode		Time/Date, MD & Exact search (accurate to second)		
Playback Functions		Play, Pause, Stop, Rewind, Fast play, Slow play, Next file, Previous file, Next camera, Previous camera, Full screen, Repeat, Shuffle, Backup selection, Digital		

DH-HCVR5204/5208/5216A-S3

	zoom	
Backup Mode	USB Device/Internal SATA burner/Network	
Network		
Ethernet	RJ-45 port (10/100M)	RJ-45 port (10/100M/1000M)
Network Functions	HTTP, IPv4/IPv6, TCP/IP, UPNP, RTSP, UDP, SMTP, NTP, DHCP, DNS, PPPOE, DDNS, FTP, IP Filter, SNMP, P2P	
Max. User Access	128 users	
Smart Phone	iPhone, iPad, Android, Windows Phone	
Storage		
Internal HDD	2 SATA ports, up to 12TB	
Auxiliary Interface		
USB Interface	2 ports(1 Rear), USB2.0	2 ports (1 Rear USB3.0, 1 Front USB2.0)
RS485	1 port, For PTZ control	
General		
Power Supply	DC12V/4A	
Power Consumption	15W(without HDD)	
Working Environment	-10°C ~ +55°C / 10%~90%RH / 86~106kpa	
Dimension(W×D×H)	1U, 375mm×285mm×55mm	
Weight	2.35KG(without HDD)	

System Connection

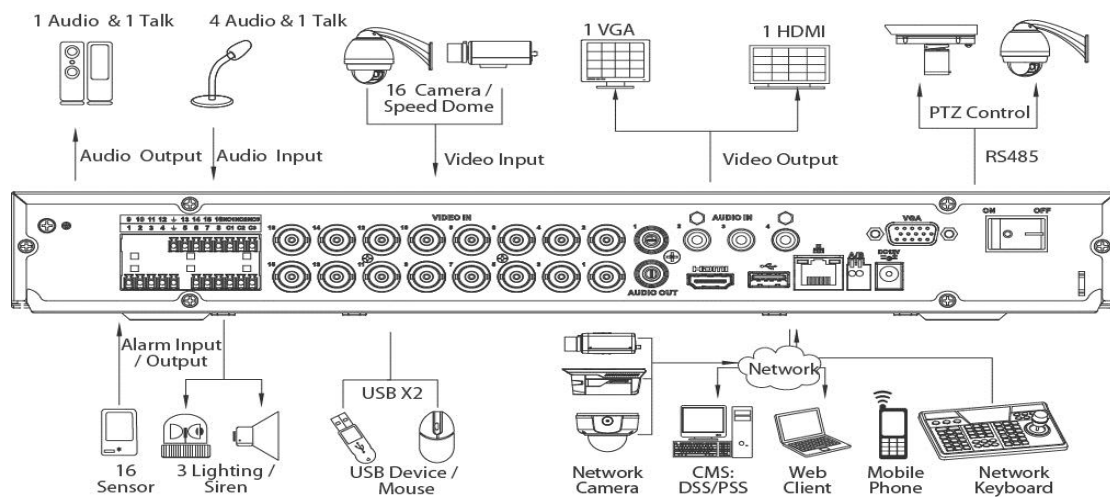

*Takes HCVR5216A-S3 as an example

Dahua Technology Co., Ltd.

1199' BinAn Road, Binjiang District, Hangzhou, China

Tel: +86-571-87688883

Fax: +86-571-87688815

Email: overseas@dahuatech.com

www.dahuatech.com



Telf: (01)489-5256 / 792-1818
 RPM: #9722-52510 / 990-340327
ventas@jcworld.com.pe
 Calle 15 Mz F Lote 25, Ofic. 101
 Urb. Prolima- Los Olivos
www.jcworld.com.pe

*Design and specifications are subject to change without notice.

© 2015 Dahua Technology Co., Ltd.