

PFM710

VGA Extender



Features

- Power supply: No need additional power supply.
- Transmission effect: Real-time transmission video without compression, no delay, strong anti-interference.
- Transmission distance: VGA video signal high fidelity transmission 75M (max)
- Main functions: Use single UTP (CAT-5E and CAT-6) transmit 1-ch video, lower cost.
- Protection and anti-interference: Excellent anti-thunder, anti-static and anti-interference capabilities.
- Appearance structure: No need to install driver program and set network parameters, easy to use and convenient to install.


PFM710

Specifications


Model	PFM710
Properties	
Transmission Signal	1 channel
Transmission Distance	75M(max)
Video Transmission Properties	
Video Signal Input Interface	Female 15, VGA port
Video Input Interface	Female 15, VGA port
Twisted-pair Video Transmission Port	RJ45 port
Video Signal Processing Bandwidth	<120MHz(-3db)
Synchronous Signal Bandwidth	1k-200kHz
Adjustment	
Transmitter	2 modes
Receiver	3 modes
Protection	
ESD	1a contact discharge electricity level 3
	1b air discharge electricity level 3
	Per: IEC61000-4-2 1995(GB/T 17626.5)
Anti-thunder	1KV
	Per: IEC61000-4-5 1995(GB/T 17626.5)
Stability	
MTBF	>5000H
Physical Properties	
Dimension(L*W*H)	Transmitter: 85mm×64mm×28 mm (port length included) Receiver: 85mm×64mm×28 mm
Shell	Aluminum
Color	Black
N.W.	Transmitter: 111g Receiver: 110g
Environmental	
Working Temperature	0-55℃
Storage Temperature	-20~80℃
Humidity	0~95%(non-condensing)

PFM710

Dimensions (mm)

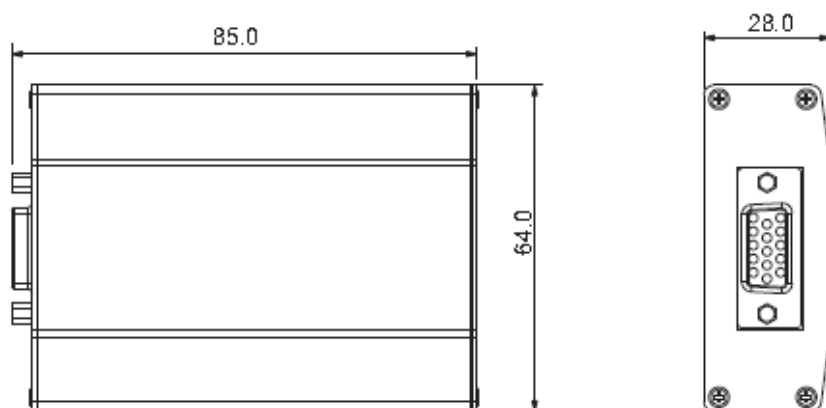

Application

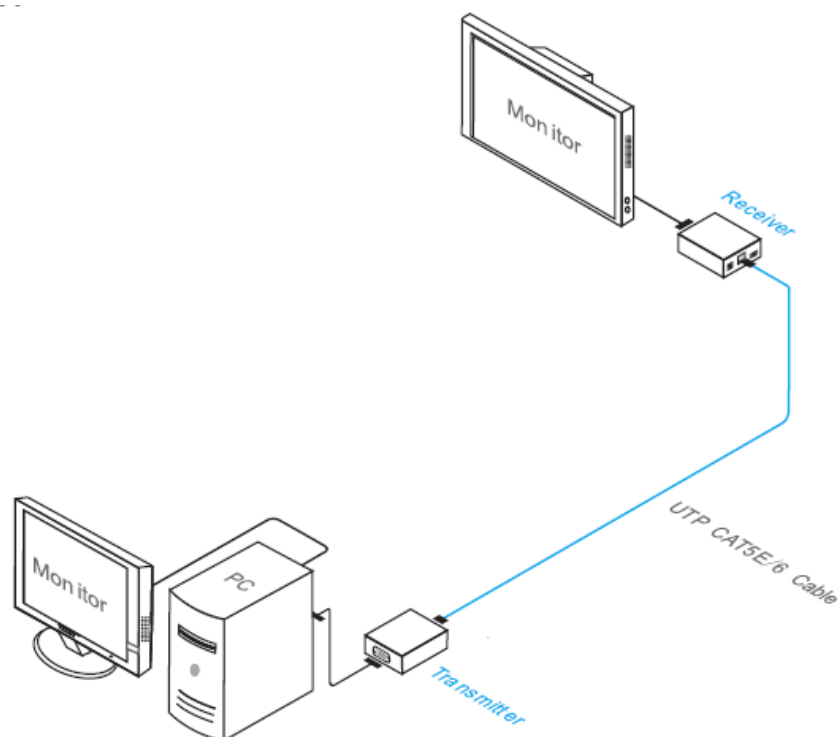

Dahua Technology Co., Ltd.

1199 BinAn Road, Binjiang District, Hangzhou, China

Tel: +86-571-87688883

Fax: +86-571-87688815

Email: overseas@dahuatech.com

www.dahuasecurity.com

*Design and specifications are subject to change without notice.

© 2013 Dahua Technology Co., Ltd.