

DH-PFM800

Passive HDCVI Balun




Specifications

Model	DH-PFM800
Properties	
Transmission Signal	1 channel
Transmission Distance	720P: 400M (max) 1080P: 250M (max)
Category Type	UTP CAT5/5E/6 (R < 10 Ω /100M)
Video Transmission Properties And Port	
Coaxial Video Connector	BNC-M
Twisted-pair Video Connector	Push-terminal
Compatible Format	HDCVI
Resolution	720P/1080P
Anti-interference	>60db
Protection	
ESD	1a contact discharge electricity level 3
	1b air discharge electricity level 3
	Per:IEC61000-4-2
Coaxial Cable Connector	2KV(common-code) Per:IEC1000-4-5
UTP Cable Connector	2KV(different-code),4KV(common-code),Per:IEC1000-4-5
Impedance	
BNC Male	75 ohms
UTP Cable	100 ohms
Physical Properties	
Dimension(L*W*H)	53mm*20mm*17mm


DH-PFM800

Shell	ABS
Color	Black
N.W.	25G
Stability	
MTBF	>10000H
Environmental	
Operating Temperature	-10~55°C
Storage Temperature	-20~70°C
Humidity	0~95%(non-condensing)

Dimensions (mm)

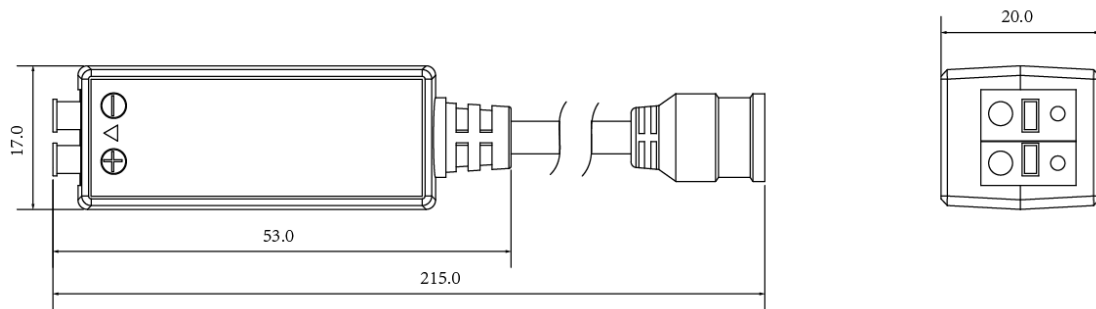

Application

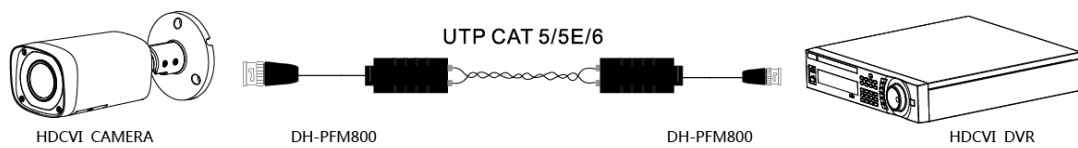

Dahua Technology Co., Ltd.

1199 BinAn Road, Binjiang District, Hangzhou, China

Tel: +86-571-87688883

Fax: +86-571-87688815

Email: overseas@dahuatech.com

www.dahuasecurity.com

*Design and specifications are subject to change without notice.

© 2013Dahua Technology Co., Ltd.