

DH-NVR1104/1108-P

4/8CH Smart 1U 4PoE Network Video Recorder



Features

- > Up to 4/8 channel IP camera input
- > H.264/MJPEG dual codec decoding
- > Max 56Mbps incoming bandwidth
- > HDMI/VGA simultaneous video output
- > All channel synchronous realtime playback, GRID interface
- > Support Multi-brand network cameras: Dahua, Arecont Vision, AXIS, Bosch, Brickcom, Canon, CP Plus, Honeywell, Panasonic, Pelco, Samsung, Sanyo, Sony, Videotec, Vivotek and etc.
- > ONVIF Version 2.3 conformance
- > 3D intelligent positioning with Dahua PTZ camera
- > Support 1 SATA HDD up to 4TB, 2 USB2.0
- > Multiple network monitoring: Web viewer, CMS(DSS/Smart PSS) & Smart Phone(DMSS)
- > Support IPC UPnP, 4PoE ports
- > Support P2P, QR code
- > Black or white case (optional)

DH-NVR1104/1108-P



Tel: (01)489-5256 / 792-1818
RPM: #9722-52510 / 990-340327
ventas@jcwORLD.com.pe
Calle 15 Mz F Lote 25, Ofic. 101
Urb. Prolima- Los Olivos
www.jcwORLD.com.pe




Technical Specifications

Model	DH-NVR1104-P	DH-NVR1108-P
System		
Main Processor	Dual-core embedded processor	
Operating System	Embedded LINUX	
Video & Audio		
IP Camera Input	4 channel	8 channel
Two-way Talk	1 channel Input,1 channel Output, RCA	
Display		
Interface	1 HDMI, 1 VGA	
Resolution	1920×1080, 1280×1024, 1280×720, 1024×768	
Display Split	1/4	1/4/8/9
OSD	Camera title, Time, Video loss, Camera lock, Motion detection, Recording	
Recording		
Compression	H.264/MJPEG	
Resolution	1080P(1920×1080)/720P(1280×720)/D1 (704×576/704×480) & etc.	
Record Rate	Max 56Mbps	
Bit Rate	48~8192kbps	
Record Mode	Manual, Schedule(Regular(Continuous), MD), Stop	
Record Interval	1~120 min (default: 60 min), Pre-record: 1~30 sec, Post-record: 10~300 sec	
Video Detection		
Trigger Events	Recording, PTZ, Tour, Video Push, Email, FTP, Snapshot, Buzzer & Screen tips	
Video Detection	Motion Detection, MD Zones: 396(22×18), Video Loss & Camera Blank	
Playback & Backup		
Sync Playback	1/4	1/4/8
Search Mode	Time/Date, MD & Exact search (accurate to second), Smart search	
Playback Function	Play, Pause, Stop, Rewind, Fast play, Slow play, Next file, Previous file, Next camera, Previous camera, Full screen, Repeat, Shuffle, Backup selection, Digital zoom	
Backup Mode	USB Device/Network/Internal SATA burner	
Network		
Ethernet	1RJ-45 port (10/100Mbps)	
PoE	4 ports (IEEE802.3af/at)	
Network Function	HTTP, TCP/IP, IPv4/IPv6, UPNP, RTSP, UDP, SMTP, NTP, DHCP, DNS, IP Filter, PPPOE, DDNS, FTP, IP Search(Support Dahua IP camera, DVR, NVS and etc.),SNMP, P2P	
Max User Access	128 users	
Smart Phone	iPhone, iPad, Android	
Storage		
Internal HDD	1 SATA port, up to 4TB	

DH-NVR1104/1108-P

Auxiliary Interface	
USB	2 ports (2 Rear), USB2.0
General	
Power Supply	Single, DC48V/1.25A
Power Consumption	NVR: 10W (without HDD)
	PoE: Max 25.5W (Single port)
Working Environment	-10°C~+55°C/10%~90%RH/86~106kpa
Dimension (W×D×H)	Smart 1U, 205mm×205mm×45mm
Weight	500g (without HDD)

System Connection

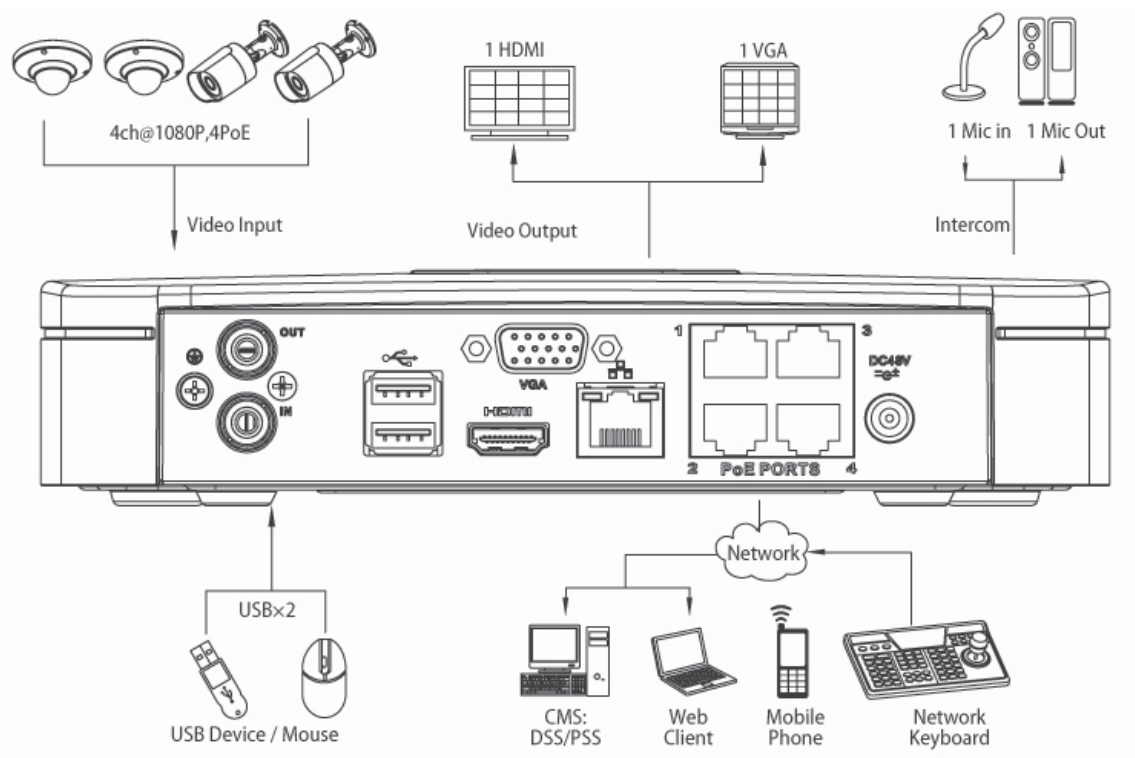

*Takes NVR1104-P as an example

Dahua Technology Co., Ltd.

1199'BinAn Road, Binjiang District, Hangzhou, China

Tel: +86-571-87688883

Fax: +86-571-87688815

Email: overseas@dahuatech.com

www.dahuasecurity.com

*Design and specifications are subject to change without notice.

© 2014 ahua Technology Co., Ltd.