

DH-NVR2104


Mini NVR de 4 Canales



Características

- > Hasta 4 canales 720p (ó 2 canales a 1080p) en tiempo real de visualización
- > Decodificación H.264/MJPEG
- > Max 60fps @ 1080p, 720p @ 120fps, 240fps @ D1 de vista previa y grabación
- > Salida de vídeo simultánea HDMI / VGA
- > Todo canal de reproducción en tiempo real síncrono, interfaz RED
- > Soporta multimarca de cámaras de red : Dahua, Arecont Vision, Axis, Bosch, Brickcom, Canon, CP Plus, Honeywell, Panasonic Pelco, Samsung, Sanyo, Sony, Videosec, Vivotech y etc .
- > Conformidad ONVIF Versión 2.2
- > Posicionamiento inteligente 3D con la cámara PTZ Dahua
- > Soporte 1 SATA HDD hasta 2TB, 2 USB2.0
- > Compatible con Plug & Play
- > Monitoreo de red múltiple: Web, CMS (DSS / PSS) y DMSS
- > Gabinete blanco

Conexión del sistema

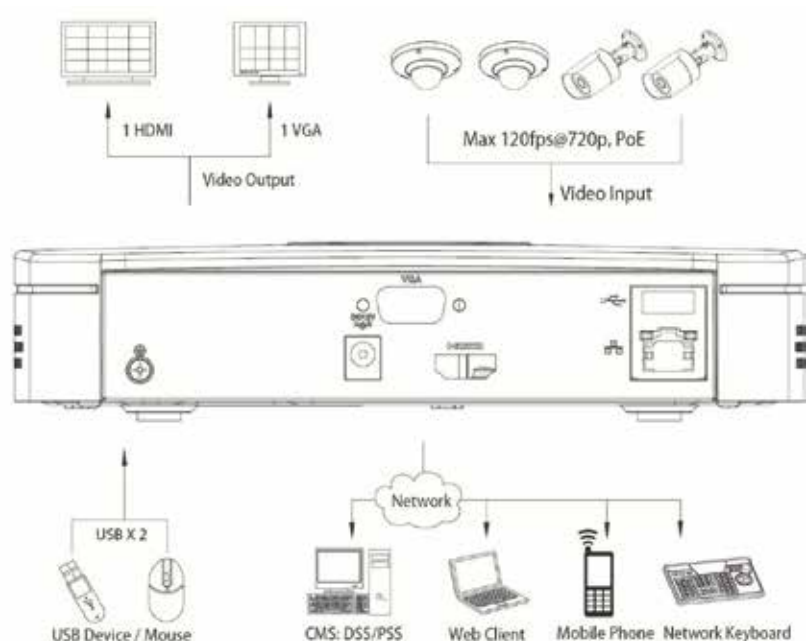

NVR2104 como ejemplo

DH-NVR2104



Especificaciones Técnicas

Model	DH-NVR2104
System	
Main Processor	Dual-core embedded processor
Operating System	Embedded LINUX
Video	
IP Camera Input	4 channel
Display	
Interface	1 HDMI, 1 VGA
Resolution	1920×1080, 1280×1024, 1280×720, 1024×768, 704×576/704×480
Display Split	1/4
OSD	Camera title, Time, Video loss, Camera lock, Motion detection, Recording
Recording	
Compression	H.264 / MJPEG
Resolution	1080p(1920×1080) / 720p(1280×720) / D1 (704×576/704×480)
Record Rate	200/240fps@D1,100/120fps@720p, 50/60fps@1080p
Bit Rate	48~ 8192kbps
Record Mode	Manual, Schedule(Regular(Continuous), MD), Stop
Record Interval	1~120 min (default: 60 min), Pre-record: 1~30 sec, Post-record: 10~300 sec
Video Detection	
Trigger Events	Recording, PTZ, Tour, Video Push, Email, FTP, Buzzer & Screen tips
Video Detection	Motion Detection, MD Zones: 396(22×18), Video Loss & Camera Blank
Playback & Backup	
Sync Playback	1/4
Search Mode	Time/Date, MD & Exact search (accurate to second), Smart search
Playback Function	Play, Pause, Stop, Rewind, Fast play, Slow play, Next file, Previous file, Next camera, Previous camera, Full screen, Repeat, Shuffle, Backup selection, Digital zoom
Backup Mode	USB Device / Network
Network	
Ethernet	1RJ-45 port (10/100M)
Network Function	HTTP, TCP/IP, IPv4/IPv6, UPNP, RTSP, UDP, SMTP, NTP, DHCP, DNS, IP Filter, PPPOE, DDNS, FTP, IP Search(Support Dahua IP camera, DVR, NVS and etc.)
Max User Access	20 users
Smart Phone	iPhone, iPad, Android, Windows Phone
Storage	
Internal HDD	1 SATA port, up to 4TB
Auxiliary Interface	
USB	2 ports (1 Rear), USB2.0
General	
Power Supply	DC12V
Power Consumption	12W (without HDD)
Working Environment	0~+55°C / 10~90%RH / 86~106kpa
Dimension(W×D×H)	205mm×205mm×45mm
Weight	600~700g (without HDD)